STAY POWERED. STAY SOARING.

STRATUS POWER MAX

THE LATEST ADDITION TO ITS ACCLAIMED LINE OF TSO-CERTIFIED USB CHARGING PRODUCTS

Stratus Power Max is designed to provide maximum power and versatility with dual USB-C connectors, each delivering up to 30 watts of charging power.

This advanced charging solution ensures that pilots and passengers can keep their devices fully charged and ready for use throughout their flights.



SCAN TO LEARN MORE ABOUT STRATUS POWER MAX

FEATURES

STRATUS

INCLUDES DUAL 3.0 AMP, 30W USB-C CHARGING PORTS

FAA CERTIFIED TO TSO-C71

EASY INSTALLATION WITH BACK AND BOTTOM CONNECTORS, AND 6FT. PRE-TERMINATED POWER HARNESS

DESIGNED AND BUILT IN THE USA

FIVE-YEAR PRODUCT WARRANTY




1810 NDSU Research Circle North Fargo, North Dakota 58102 USA 701.356.2200





USB-C	WEIGHT	2.56 oz
10-32 VDC	OUTPUT VOLTAGE RANGE	5.0 VDC +/- 0.25V 9.0 VDC +/- 0.45V
<25 mA at 14V and 28V with no USB connections		15 VDC +/- 0.75V
2.5A at 28V at full output load on both ports	MAX CURRENT OUTPUT	3.0A at 5V output 3.0A at 9V output 2.0A at 15V output
4.8A at 14V at full output load on both ports	RATING	30 watts per port
DIMENSIONS 1.85" W x 1.85" H x 0.96" D (47.0 mm W x 47.0 mm H x 24.8 mm D)	MOUNTING	Back & Bottom Connectors
	CERTIFICATION	FAA TSO-C71
	10-32 VDC <25 mA at 14V and 28V with no USB connections 2.5A at 28V at full output load on both ports 4.8A at 14V at full output load on both ports 1.85" W x 1.85" H x 0.96" D	10-32 VDCOUTPUT VOLTAGE RANGE<25 mA at 14V and 28V with no USB connectionsMAX CURRENT OUTPUT2.5A at 28V at full output load on both portsMAX CURRENT OUTPUT4.8A at 14V at full output load on both portsRATING1.85" W x 1.85" H x 0.96" D (47.0 mm W x 47.0 mm H x 24.8 mm D)MOUNTING

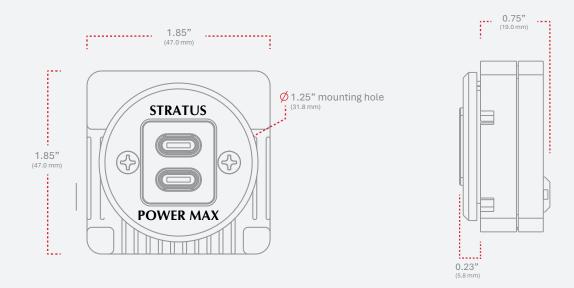

APPAREO

1810 NDSU Research Circle North Fargo, North Dakota 58102 USA 701.356.2200 by <u>APPAREO</u> stratusbyappareo.com/stratus-power-max

STRATUS